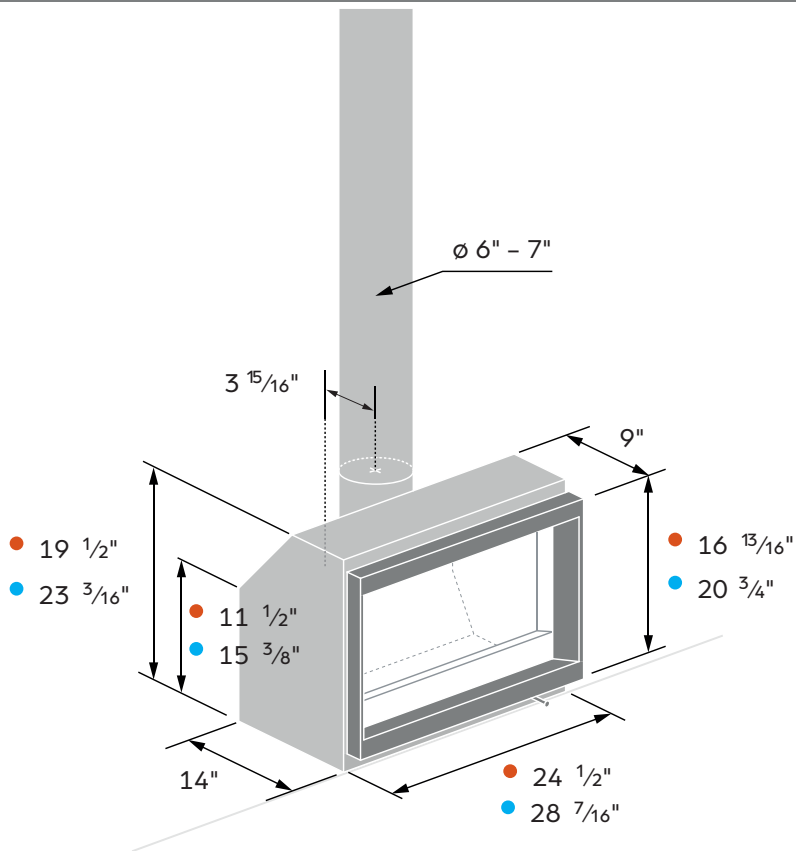



Stûv 6-in

Technical sheet




ADVANTAGES

- Heating power adapted to the smallest spaces
-
- Precision assembly
-
- Automatic combustion air inlet calibration
-
- Produces little ash
-
- Easy to light
-
- Fits all masonry hearths
-
- Energy-efficient performance



• **66x50**



• **76x60***





Size	• 66x50	• 76x60*
Certification	EPA CSA B415 ULC S628 UL 1482-7	CSA B415 ULC S628 UL 1482-7
Efficiency (EPA)	68,4%	68,3%
Maximum length of logs	16"	20"
Maximum power (BTU)	34 000	48 000
Heating surface area	1 000 pi ²	1 400 pi ²
Firebox size	1.08 pi ³	1.58 pi ³
Particle emissions	1,93 g/h	1,89 g/h
Weight	165 lb	200 lb
Outside air duct	ø 4"	ø 4"
Floor protection	36 9/16" x 16 1/8"	40 1/2" x 16 1/8"
Glass width	20 9/16"	24 1/2"
Glass height	12 1/16"	16"

* This model is available in Canada, soon in United States.
Dimensions for information only. See the installation manuals for details.

FINISHING FRAMES

REQUIRED ACCESSORY

Choose from the following options:

				
			66X50	76X60*
THIN EDGE		Width	26"	29 ¹⁵ / ₁₆ "
		Height	19 ¹¹ / ₁₆ "	23 ⁵ / ₈ "
PICTURE TYPE 2"		Width	29 ³ / ₈ "	33 ⁵ / ₁₆ "
		Height	21 ³ / ₈ "	25 ⁵ / ₁₆ "
PICTURE TYPE 4"		Width	33 ⁵ / ₁₆ "	37 ¹ / ₄ "
		Height	23 ³ / ₈ "	27 ⁵ / ₁₆ "
PICTURE TYPE 6"		Width	37 ¹ / ₄ "	41 ³ / ₁₆ "
		Height	25 ⁵ / ₁₆ "	29 ¹ / ₄ "

* This model is available in Canada, soon in United States.
Dimensions for information only. See the installation manuals for details.

AVAILABLE COLOR



Matte black – STOVE BRIGHT 6304