

Plusminus

Design by Diez Office

VIBIA

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.



Luminaire finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

LED color temperature

2700 K / 3000 K / 3500 K.

Dimming control options

On/ Off.
Simultaneous line DALI, 0-10V, Push, Casambi. Casambi integrated on each individual luminaire (P2P).

Electrical connection options

Surface
Recessed
Remote
Plug-in

Belt

Polyester.

- Black
- Terra Red
- Blue
- Green
- Beige

Remarks


Maximum 96 feet length per electrical connection point.

Fire Hazard Testing, GW-960. Fulfills the requirements of: standards EN 60695-2-10:2013; EN 60695-2-11:2015; EN 60695-2-12:2011 / A1:2014

Installation and assembly:

Please, see the installation manual.

www.vibia.com ► Professional area
and together with the product you'll receive a personalized installation guide with all the details of your composition and guidance for its correct and easy installation.



Sphere

360° Diffusion lighting




Ø 7 3/4"
6230



Ø 11 3/4"
6235

6230



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
1 x LED 7.9 W 450mA.
846 lm. 107.09 lm/W.

Packaging


1 Box
10 1/4" x 10 1/4" x 10 1/4"
Vol. 0.618 ft³.
Gross weight 3.44 lbs.
Net weight 2.05 lbs.

Dimming control

- 6230_/_/0 On/ Off
- 6230_/_/F Simultaneous line DALI, 0-10V, Push, Casambi
- 6230_/_/Z Casambi integrated on each individual luminaire (P2P)

LED IP20 cULus Dimmable

6235



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
1 x LED 16 W 850mA.
1492 lm. 93.25 lm/W.



Packaging

1 Box
14 1/4" x 14 1/4" x 14 1/4"
Vol. 1.702 ft³.
Gross weight 5.51 lbs.
Net weight 3.97 lbs.

Dimming control

- 6235_/_/0 On/ Off
- 6235_/_/F Simultaneous line DALI, 0-10V, Push, Casambi
- 6235_/_/Z Casambi integrated on each individual luminaire (P2P)

LED IP20 cULus Dimmable

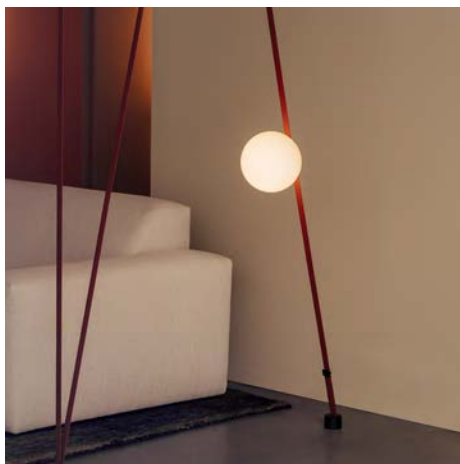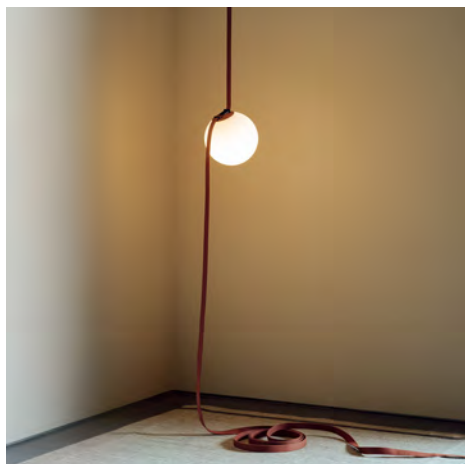


Semisphere

Directed diffusion lighting



6220



- Finishes**
- 11 Black (NCS S 8500-N)
 - 24 Beige M1 (NCS S 2005-Y50R)
 - 37 Terra Red (NCS S 4040-Y70R)
 - 42 Blue M1 (NCS S 5010-B10G)
 - 53 Green M1 (NCS S 6005-G80Y)
- Materials**
- Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7.9 W 450mA.
846 lm. 107.09 lm/W.

Packaging


1 Box
10 1/4" x 10 1/4" x 10 1/4".
Vol. 0.618 ft³.
Gross weight 2.64 lbs.
Net weight 1.72 lbs.

Dimming control

6220_/_0 On/ Off
6220_/_F Simultaneous line
DALI, 0-10V, Push, Casambi
6220_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 cULus Dimmable

6225



- Finishes**
- 11 Black (NCS S 8500-N)
 - 24 Beige M1 (NCS S 2005-Y50R)
 - 37 Terra Red (NCS S 4040-Y70R)
 - 42 Blue M1 (NCS S 5010-B10G)
 - 53 Green M1 (NCS S 6005-G80Y)
- Materials**
- Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 16 W 850mA.
1492 lm. 93.25 lm/W.

Packaging

1 Box
14 1/4" x 14 1/4" x 14 1/4".
Vol. 1.702 ft³.
Gross weight 4.41 lbs.
Net weight 3.31 lbs.

Dimming control

6225_/_0 On/ Off
6225_/_F Simultaneous line
DALI, 0-10V, Push, Casambi
6225_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 cULus Dimmable



Cone

Directed diffusion lighting




Ø 23 1/2"
6240



Ø 31 1/2"
6245

6240



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
- 1 x LED 16 W 850mA.
1492 lm. 93.25 lm/W.

Packaging


1 Box
28 1/2" x 28 1/2" x 12 1/2".
Vol. 5.972 ft³.
Gross weight 11.02 lbs.
Net weight 5.51 lbs.

Dimming control

- 6240_/_0 On/ Off
- 6240_/_F Simultaneous line DALI, 0-10V, Push, Casambi
- 6240_/_Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable

6245



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
- 1 x LED 16 W 850mA.
1492 lm. 93.25 lm/W.


Packaging

1 Box
37 3/4" x 37 3/4" x 10 1/2".
Vol. 8.786 ft³.
Gross weight 15.43 lbs.
Net weight 7.72 lbs.

Dimming control


- 6245_/_0 On/ Off
- 6245_/_F Simultaneous line DALI, 0-10V, Push, Casambi
- 6245_/_Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable

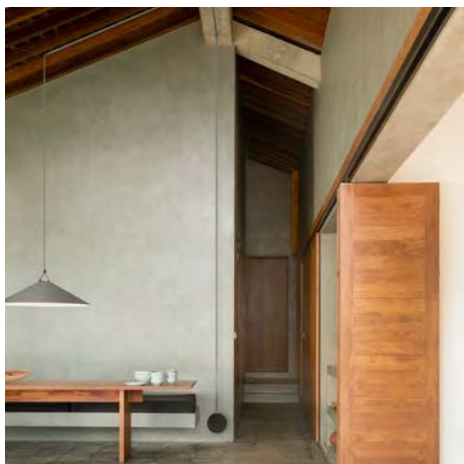

Spotlight

Accent lighting

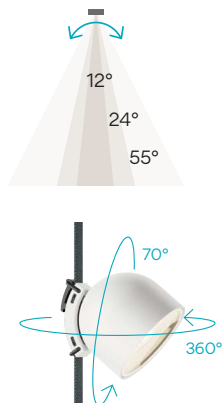

12°



6200




Ø 4"
6200

Medium flood 24°



6205

Wide flood 55°




6210



Ø 4"
6205 6210

6200



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7.9 W 450mA.
916 lm. 115.95 lm/W.

Packaging

1 Box
7 1/2" x 6 1/4" x 5 3/4".
Vol. 0.162 ft³.
Gross weight 1.59 lbs.
Net weight 1.12 lbs.


Dimming control

6200_/_0 On/ Off
6200_/_F Simultaneous line
DALI, 0-10V, Push, Casambi
6200_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 cULus Dimmable

6205

Medium flood 24°



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7.9 W 450mA.
916 lm. 115.95 lm/W.

Packaging

1 Box
7 1/2" x 6 1/4" x 5 3/4".
Vol. 0.162 ft³.
Gross weight 1.59 lbs.
Net weight 1.12 lbs.


Dimming control

6205_/_0 On/ Off
6205_/_F Simultaneous line
DALI, 0-10V, Push, Casambi
6205_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 cULus Dimmable

6210

Wide flood 55°



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7.9 W 450mA.
916 lm. 115.95 lm/W.

Packaging

1 Box
7 1/2" x 6 1/4" x 5 3/4".
Vol. 0.162 ft³.
Gross weight 1.59 lbs.
Net weight 1.12 lbs.



Dimming control

6210_/_0 On/ Off
6210_/_F Simultaneous line
DALI, 0-10V, Push, Casambi
6210_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 cULus Dimmable

Spotlight


Directed diffusion lighting



Ø 4"
6215

6215

Directed diffusion lighting



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- 1 x LED 4.2 W 250mA.
491 lm. 116.9 lm/W.

Packaging

1 Box
7 1/2" x 6 1/4" x 5 3/4".
Vol. 0.162 ft³.
Gross weight 1.59 lbs.
Net weight 1.12 lbs.

Dimming control



- 6215_/_/0 On/ Off
- 6215_/_/F Simultaneous line DALI, 0-10V, Push, Casambi
- 6215_/_/Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable




Linear Diffuser

General lighting

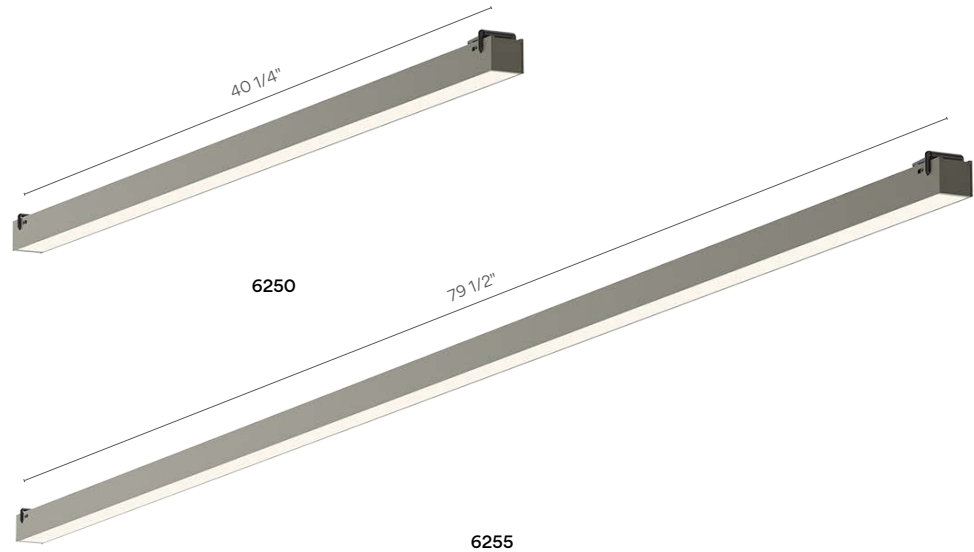

6250



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20.6W 24V.
2544 lm. 123.3 lm/W.

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Packaging

1 Box
2 1/4" x 2 1/4" x 49 1/4".
Vol. 0.201 ft³.
Gross weight 3.31 lbs.
Net weight 1.59 lbs.

Dimming control


6250_/_/0 On/ Off

6250_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6250_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6255



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41.3 W 24V.
5088 lm. 123.3 lm/W.

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Packaging

1 Box
2 1/4" x 2 1/4" x 88 1/4".
Vol. 0.364 ft³.
Gross weight 4.41 lbs.
Net weight 3.20 lbs.



Dimming control

6255_/_/0 On/ Off

6255_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi



6255_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

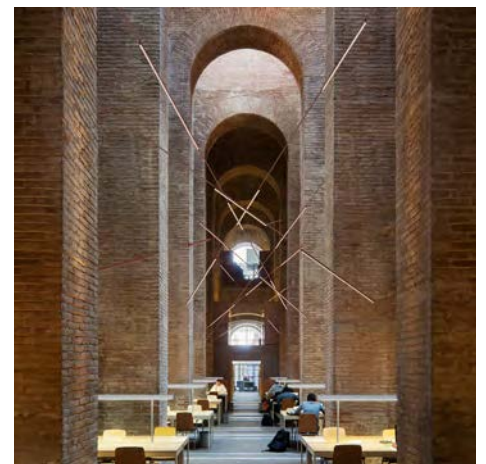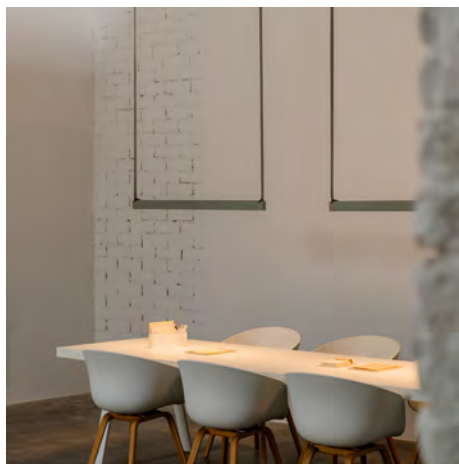


Linear Low UGR - High-Comfort

High-comfort,
low-glare general linear lighting

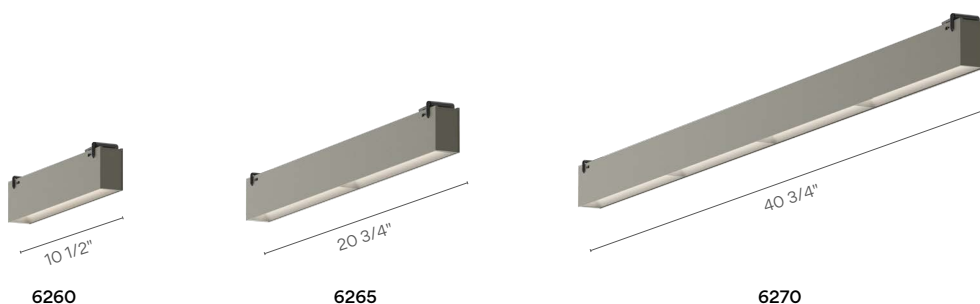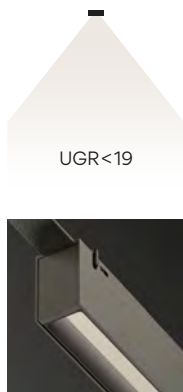

6260



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 10.3W 24V.
1336 lm. 132.43 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
3 1/4" x 4 1/4" x 12 1/4".
Vol. 0.099 ft³.
Gross weight 1.76 lbs.
Net weight 0.90 lbs.

Dimming control


6260_/_/0 On/ Off

6260_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6260_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6265



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20.6W 24V.
2731 lm. 132.3 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
3 1/4" x 4 1/4" x 22 1/2".
Vol. 0.177 ft³.
Gross weight 3.31 lbs.
Net weight 1.96 lbs.

Dimming control


6265_/_/0 On/ Off

6265_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6265_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6270



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41.3W 24V.
5462 lm. 132.3 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
3 1/4" x 4 1/4" x 43 1/4".
Vol. 0.339 ft³.
Gross weight 5.51 lbs.
Net weight 3.31 lbs.

Dimming control

6270_/_/0 On/ Off



6270_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6270_/_/Z Casambi integrated on each
individual luminaire (P2P)


LED IP20 Dimmable

Linear Low UGR - High-Efficiency

High-efficiency,
low-glare general linear lighting

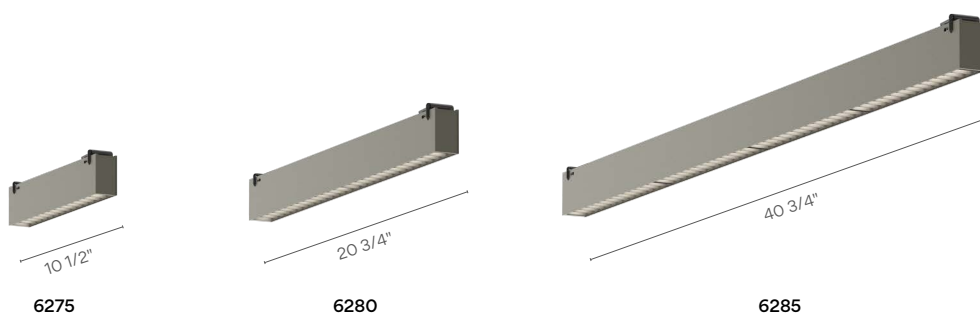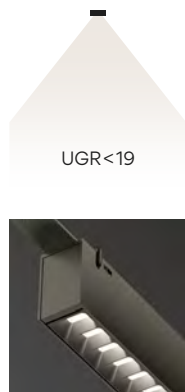

6275



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 10.3W 24V.
1336 lm. 132.43 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
3 1/4" x 4 1/4" x 12 1/4". Vol. 0.099 ft³.
Gross weight 1.76 lbs.
Net weight 0.90 lbs.

Dimming control


6275_/_/0 On/ Off

6275_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6275_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6280



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20.6W 24V.
2731 lm. 132.3 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
3 1/4" x 4 1/4" x 22 1/2".
Vol. 0.177 ft³.
Gross weight 3.31 lbs.
Net weight 1.96 lbs.

Dimming control


6280_/_/0 On/ Off

6280_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6280_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6285



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41.3W 24V.
5462 lm. 132.3 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
3 1/4" x 4 1/4" x 43 1/4".
Vol. 0.339 ft³.
Gross weight 5.51 lbs.
Net weight 3.31 lbs.

Dimming control

6285_/_/0 On/ Off

6285_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6285_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

Accessories Toolbox

Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.



Electrical connection options

Choose your preferred installation
option according to your needs.



Surface



Remote
Recessed



Surface



Plug-in




Optional wire
connector

Dimming control options

Choose your preferred installation
option according to your needs.

Dimming Control	Electrical Connection		
	Surface 25 - 100 W	Remote 25 - 100 W	Plug-in Max 60W
On / Off	✓	✓	✓
Push Switch	—	—	✓
Push Simultaneous	✓	✓	—
0-10V Simultaneous	✓	✓	—
DALI Simultaneous	✓	✓	—
Casambi Simultaneous	✓	✓	—
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓



Surface Canopy S

E1 Ø 8"

Wattage options:
< 60W.

Driver Constant Voltage 42V.
100~240VAC. 50/60Hz.


Dimming options:

On/ Off.
Simultaneous line DALI / 0-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 2.0 lbs.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Surface Canopy M

E2 Ø 10 1/4"

Wattage options:
<100W.

Driver Constant Voltage 42V.
100~240VAC. 50/60Hz.


Dimming options:

On/ Off.
Simultaneous line DALI / 0-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 4.0 lbs.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Remote Recessed Canopy

E4 Ø 2 3/4"

Wattage options:
>25W.
<100W.

Driver Constant Voltage 42V.
100~240VAC. 50/60Hz.


Dimming options:

On/ Off.
Simultaneous line DALI / 0-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 1.9 - 3.4 lbs.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Remote Surface Canopy

E5 Ø 2 1/4"

Wattage options:
>25W.
<100W.

Driver Constant Voltage 42V.
100~240VAC. 50/60Hz.


Dimming options:

On/ Off.
Simultaneous line DALI / 0-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: Aluminum.
Net weight 2.1 - 3.8 lb.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Plug-in Floor Switch

E6 Ø 3 1/2"

Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.


Dimming options:

On/ Off.
Push.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Wire Connector

E8 Wire Ø 1/8"

Wattage options:
< 60W.

Wire connector

E8 Wire Ø 1/4".

Wattage options:
> 60W.
<100W.

Body: ABS.

Cable length option: 118" or 354"

11 Black
(NCS S 8500-N)

IP20 