
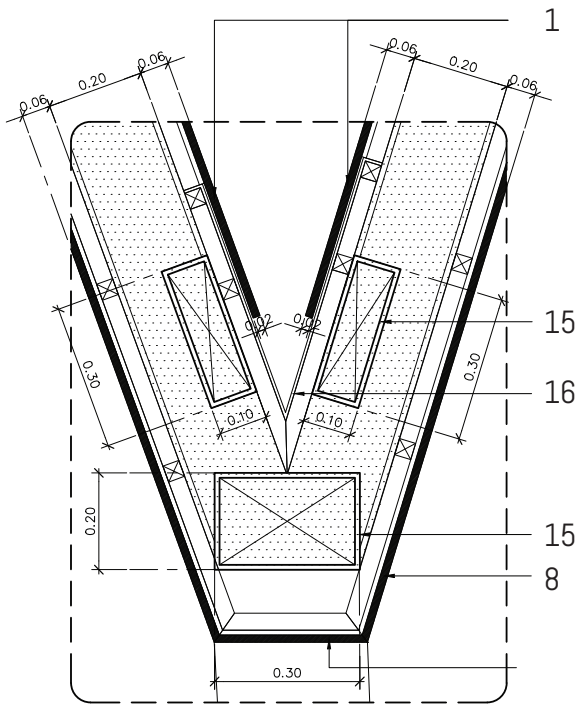
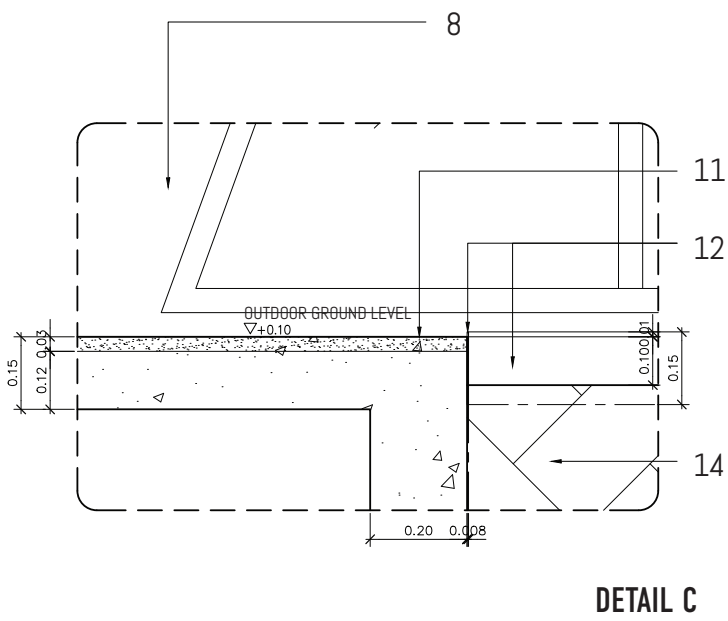
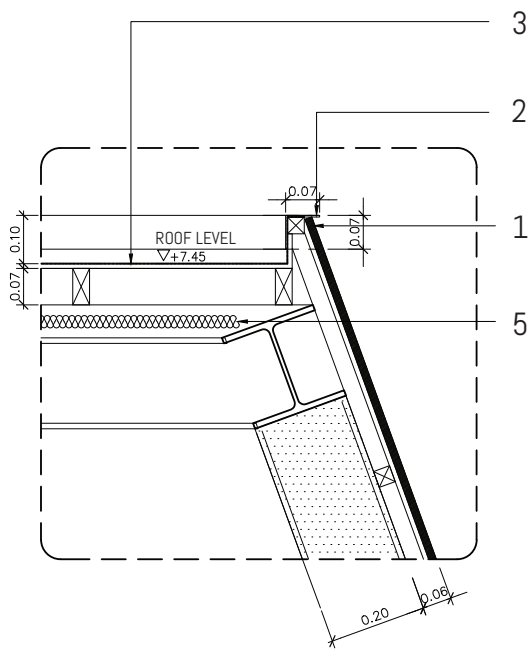
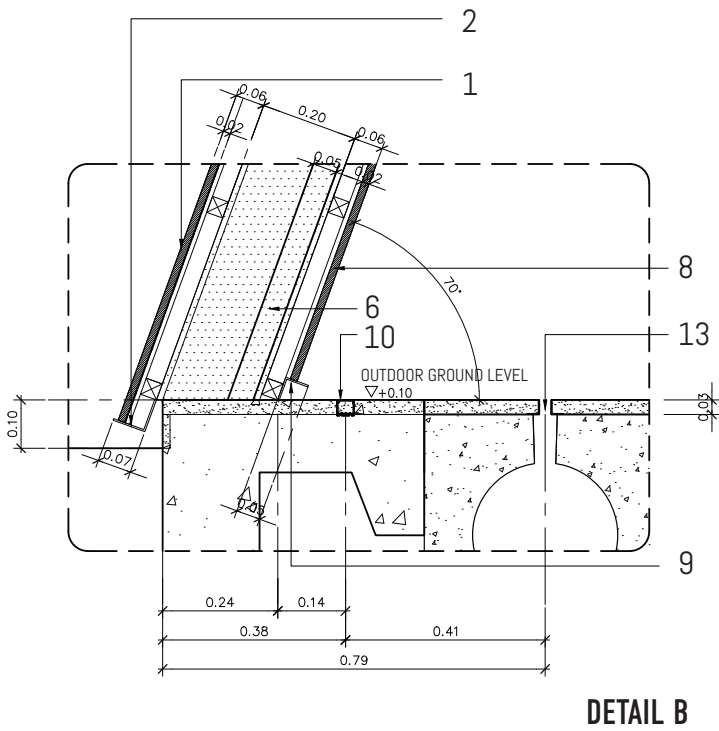
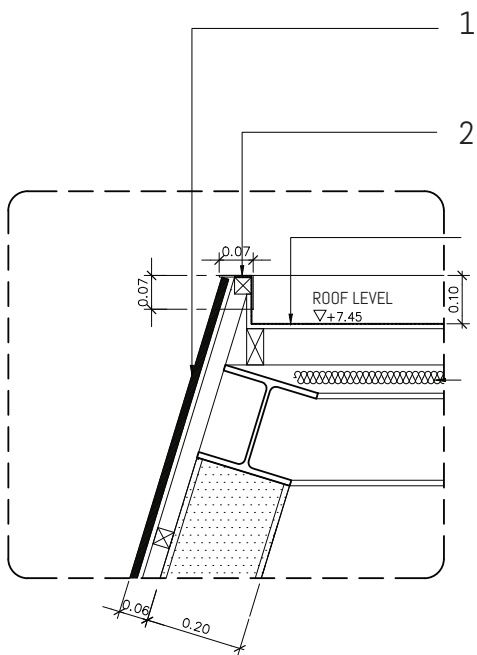


WALL SECTION 1

WALL SECTION 2

- 1 Plywood on steel frame, lined with membrane waterproofing 3mm, finishing with 4"x1/2" grooved vertical shiplap in red pine wood.
- 2 4"x1/2" grooved red pine wood ceiling with steel frame.
- 3 Roof Drain
- 4 Plywood on steel frame, lined with 4"x1/2" grooved vertical shiplap in red pine wood.
- 5 Plywood 10 mm thick, finished with wood veneer

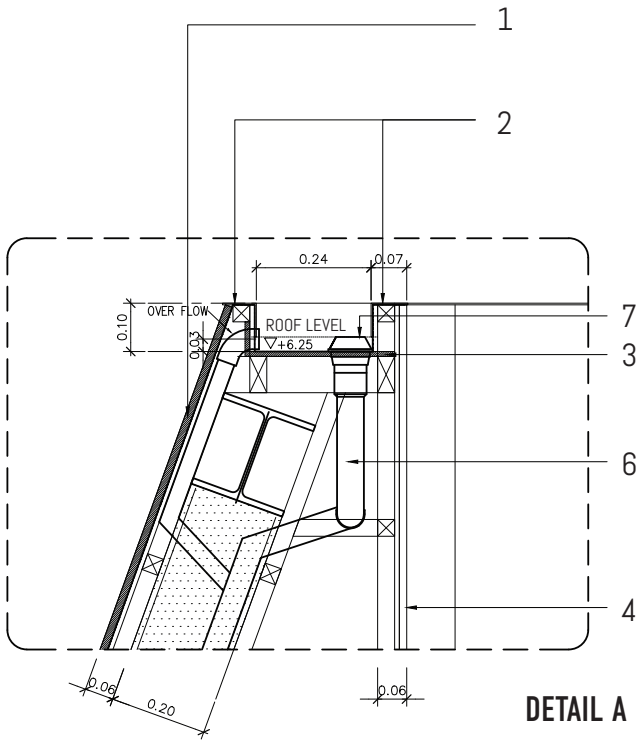

- 1 Plywood on steel frame, lined with membrane waterproofing 3mm, finishing with 4"x1/2" grooved vertical shi lap in red pine wood.
- 2 75x75 welded Steel Plate 1.8 mm thick, coated with rust-proof paint and treated in black.
- 3 20mm. Smartboard, leveled with EPS foam with waterproofing membrane.
- 4 4"x1/2" grooved red pine wood ceiling with steel frame.
- 5 Polyurethane Foam (PU Foam)
- 6 Drainage pipe
- 7 Roof Drain
- 8 Plywood on steel frame, lined with 4"x1/2" grooved vertical shi lap in red pine wood.

- 9 50x50 welded Steel Plate 1.8 mm thick, coated with rust-proof paint and treated in black.
- 10 Floor recessed exterior LED.
- 11 Reinforced concrete floor with terrazzo tiles, 60 x 60 cm in size. Dark grey color
- 12 Stainless steel with hairline surface, curved according to design, 4 mm thick.
- 13 Embedded stainless steel gutter
- 14 Planter
- 15 Steel tube
- 16 Zinc rain gutter 4 mm thick,
- 17 Plywood 10 mm thick, finished with wood veneer